


STEEL SECTIONS

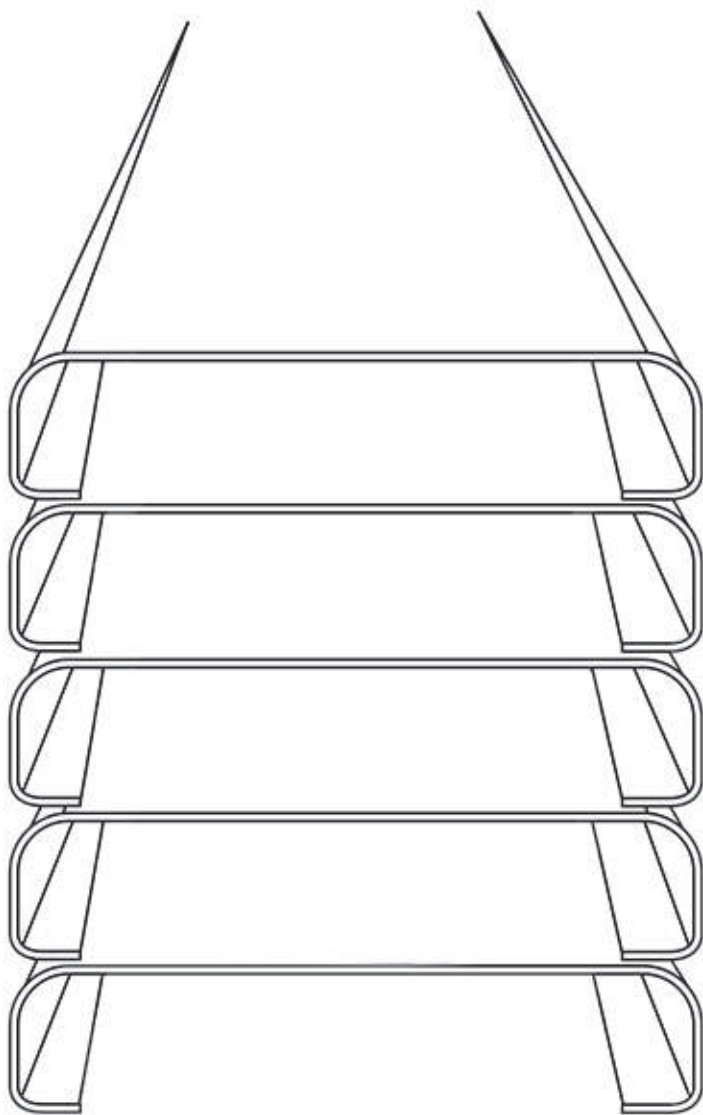

Structural steel sections, cold rolled.

Finish: coated or non-coated at customer's request

CHARACTERÍSTICAS

Special product subject to minimum orders

Rollers available in red finish for commercial use and gray finish for high resistance

Applicable standards ASTM A500, A513.

APPLICATIONS AND USES

The coated roller avoids oxidation and it's used on roofs for buildings, warehouses, storage structures as a support for grooved metal sheets and any type of roof material.

www.magnacero.com

ventas@magnacero.com

01 (477) 194 18 00

STEEL SECTIONS

* Z' STEEL SECTION SPECIFICATIONS

CAMBER (Inches)	WIDTH (Inches)	CAL	A CAMBER (m)	B WIDTH (m)	B5 WIDTH (mm)	C FOLD (mm)	E THICKNESS (mm)	LENGTH (m)	ASSUMED WEIGHT (kg/m)	PIECES PER PACK
14	3.5	10	356	89	95	25	3.42	14	15	12
14	3.5	12	356	89	95	25	2.66	14	12.1	12
14	3.5	14	356	89	95	25	1.90	14	8.7	12
12	3.5	10	305	89	95	25	3.42	12	13.6	12
12	3.5	12	305	89	95	25	2.66	12	11	12
12	3.5	14	305	89	95	25	1.90	12	7.9	12
10	2.75	10	254	70	76	19	3.42	10	11.2	12
10	2.75	12	254	70	76	19	2.66	10	9.1	12
10	2.75	14	254	70	76	19	1.90	10	6.5	12
10	2.75	16	254	70	76	19	1.52	10	5.2	12
9	2.75	10	229	70	76	19	3.42	9	10.6	12
9	2.75	12	229	70	76	19	2.66	9	8.5	12
9	2.75	14	229	70	76	19	1.90	9	6.1	12
9	2.75	16	229	70	76	19	1.52	9	4.9	12
8	2.75	10	203	70	76	19	3.42	8	9.9	24
8	2.75	12	203	70	76	19	2.66	8	8	24
8	2.75	14	203	70	76	19	1.90	8	5.7	24
8	2.75	16	203	70	76	19	1.52	8	4.5	24
7	2.75	10	178	70	76	19	3.42	7	9.2	24
7	2.75	12	178	70	76	19	2.66	7	7.4	24
7	2.75	14	178	70	76	19	1.90	7	5.3	24
7	2.75	16	178	70	76	19	1.52	7	4.2	24
6	2.0	10	152	51	57	19	3.42	6	7.3	48
6	2.0	12	152	51	57	19	2.66	6	5.9	48
6	2.0	14	152	51	57	19	1.90	6	4.2	48
6	2.0	16	152	51	57	19	1.52	6	3.3	48
5	2.0	10	127	51	57	19	3.42	6	6.6	48
5	2.0	12	127	51	57	19	2.66	6	5.3	48
5	2.0	14	127	51	57	19	1.90	6	3.8	48
5	2.0	16	127	51	57	19	1.52	6	3	48
4	2.0	10	102	51	57	19	3.42	6	5.9	48
4	2.0	12	102	51	57	19	2.66	6	4.8	48
4	2.0	14	102	51	57	19	1.90	6	3.4	48
4	2.0	16	102	51	57	19	1.52	6	2.7	48
4	1.5	10	102	38	44	19	3.42	6	5.2	48
4	1.5	12	102	38	44	19	2.66	6	4.2	48
4	1.5	14	102	38	44	19	1.90	6	3	48
4	1.5	16	102	38	44	19	1.52	6	2.4	48

* Z' STEEL SECTION SPECIFICATIONS

CAMBER (Inches)	WIDTH (Inches)	CAL	A CAMBER (m)	B WIDTH (m)	B5 WIDTH (mm)	C FOLD (mm)	E THICKNESS (mm)	LENGTH (m)	ASSUMED WEIGHT (kg/m)	PIECES PER PACK
14	3.5	10	356	89	95	25	3.42	14	15	12
14	3.5	12	356	89	95	25	2.66	14	12.1	12
14	3.5	14	356	89	95	25	1.90	14	8.7	12
12	3.5	10	305	89	95	25	3.42	12	13.6	12
12	3.5	12	305	89	95	25	2.66	12	11	12
12	3.5	14	305	89	95	25	1.90	12	7.9	12
10	2.75	10	254	70	76	19	3.42	10	11.2	12
10	2.75	12	254	70	76	19	2.66	10	9.1	12
10	2.75	14	254	70	76	19	1.90	10	6.5	12
10	2.75	16	254	70	76	19	1.52	10	5.2	12
9	2.75	10	229	70	76	19	3.42	9	10.6	12
9	2.75	12	229	70	76	19	2.66	9	8.5	12
9	2.75	14	229	70	76	19	1.90	9	6.1	12
9	2.75	16	229	70	76	19	1.52	9	4.9	12
8	2.75	10	203	70	76	19	3.42	8	9.9	24
8	2.75	12	203	70	76	19	2.66	8	8	24
8	2.75	14	203	70	76	19	1.90	8	5.7	24
8	2.75	16	203	70	76	19	1.52	8	4.5	24
7	2.75	10	178	70	76	19	3.42	7	9.2	24
7	2.75	12	178	70	76	19	2.66	7	7.4	24
7	2.75	14	178	70	76	19	1.90	7	5.3	24
7	2.75	16	178	70	76	19	1.52	7	4.2	24
6	2.0	10	152	51	57	19	3.42	6	7.3	48
6	2.0	12	152	51	57	19	2.66	6	5.9	48
6	2.0	14	152	51	57	19	1.90	6	4.2	48
6	2.0	16	152	51	57	19	1.52	6	3.3	48
5	2.0	10	127	51	57	19	3.42	6	6.6	48
5	2.0	12	127	51	57	19	2.66	6	5.3	48
5	2.0	14	127	51	57	19	1.90	6	3.8	48
5	2.0	16	127	51	57	19	1.52	6	3	48
4	2.0	10	102	51	57	19	3.42	6	5.9	48
4	2.0	12	102	51	57	19	2.66	6	4.8	48
4	2.0	14	102	51	57	19	1.90	6	3.4	48
4	2.0	16	102	51	57	19	1.52	6	2.7	48
4	1.5	10	102	38	44	19	3.42	6	5.2	48
4	1.5	12	102	38	44	19	2.66	6	4.2	48
4	1.5	14	102	38	44	19	1.90	6	3	48
4	1.5	16	102	38	44	19	1.52	6	2.4	48