




BARBED WIRE

Magnacero's barbed wire is made with two galvanized wires threaded longitudinally and tied with two additional twisted wires that shape the barbs. The quality control of the raw materials used to manufacture our barbed wire insures a product that greatly resists tension and corrosion plus being very comfortable to handle during installation.

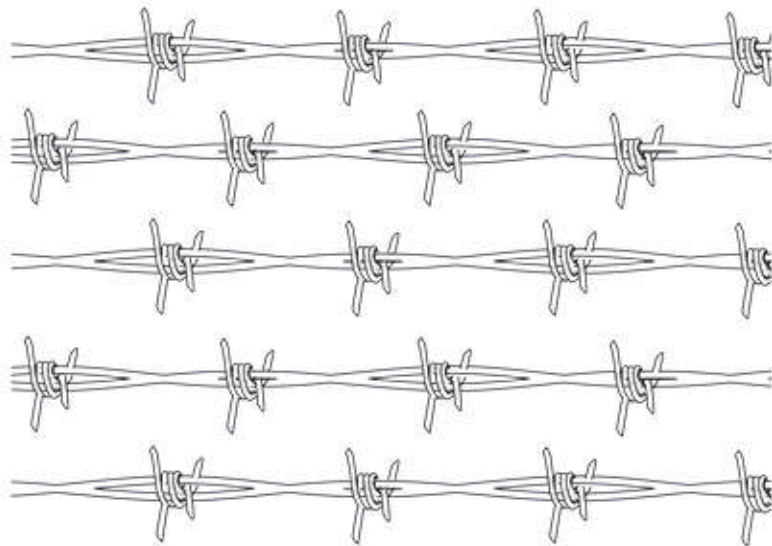

CHARACTERÍSTICS

Ideal for perimeter fencing of all types, farming, cattle, urban or as a security addition.

Magnacero's barbed wire is manufactured to meet ASTM A21 standards and can be rolled in different length rolls to meet customer's special requirement with a minimum length of 100 meters.

	STANDARD OR COMMERCIAL BARB		HIGH RESISTANCE BARB					
	30 +/- 0.5	34 +/- 0.5	12.2 - 13.1	14.7 - 15.7	13.2 - 14.1	15.9 - 16.9	12.6 - 13.4	15.1 - 16.2
Approximate weight per roll (kg)	30 +/- 0.5	34 +/- 0.5	12.2 - 13.1	14.7 - 15.7	13.2 - 14.1	15.9 - 16.9	12.6 - 13.4	15.1 - 16.2
Approximate length (meters)	320	360	300	360	300	360	300	360
Middle wire gage	12 1/2	12 1/2	16	16	15 1/2	15 1/2	15 1/2	15 1/2
Barbed wire gage	14 1/2	14 1/2	16 1/2	16 1/2	16 1/2	16 1/2	16 1/2	16 1/2
*Spacing between barbs (inches)	5	5	5	5	5	5	5	5
**Number of prongs	4	4	4	4	4	4	4	4
Minimum rupture resistance (kgf)	431	431	454	454	454	454	454	454

Wire Roll weight can be up to 42Kg in the commercial class or meters based on need in class I and III

*Spacing between barbs can be 3, 4 or 5 inches

** 2 or 4 prong wire can be manufactured

www.magnacero.com

ventas@magnacero.com

01 (477) 194 18 00